


Modifications



- I/O wiring, alarm and color 1 (yellow), tied together.
- Derived from model K50LRXA2XPQ, p/n 29494.
- For further information see standard literatures: 1135242, 134101.
- This product has been modified from the standard product,
for further information, contact the Applications Department at (763) 544-3164.

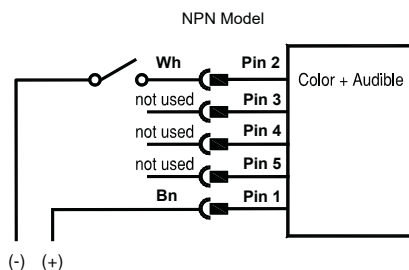

Parameters	Specifications
Supply Voltage and Current	18 to 30V dc, 70mA maximum current LED color + alarm
Supply Protection Circuitry	Protected against reverse polarity and transient voltages.
Operating Conditions	Temperature: -20° to +50°C
Indicator and Audible	Yellow flashes and audible pulses at 1.6Hz rate, 50% duty cycle

For further information, contact the Applications Engineering Department at (763) 544-3164.



WARNING . . . Not To Be Used for Personnel Protection

Never use these products as sensing devices for personnel protection. Doing so could lead to serious injury or death.

These sensors do NOT include the self-checking redundant circuitry necessary to allow their use in personnel safety applications. A sensor failure or malfunction can cause either an energized or de-energized sensor output condition. Consult your current Banner Safety Products catalog for safety products which meet OSHA, ANSI and IEC standards for personnel protection.